


HOLDING TOOLS


ROD HOLDER

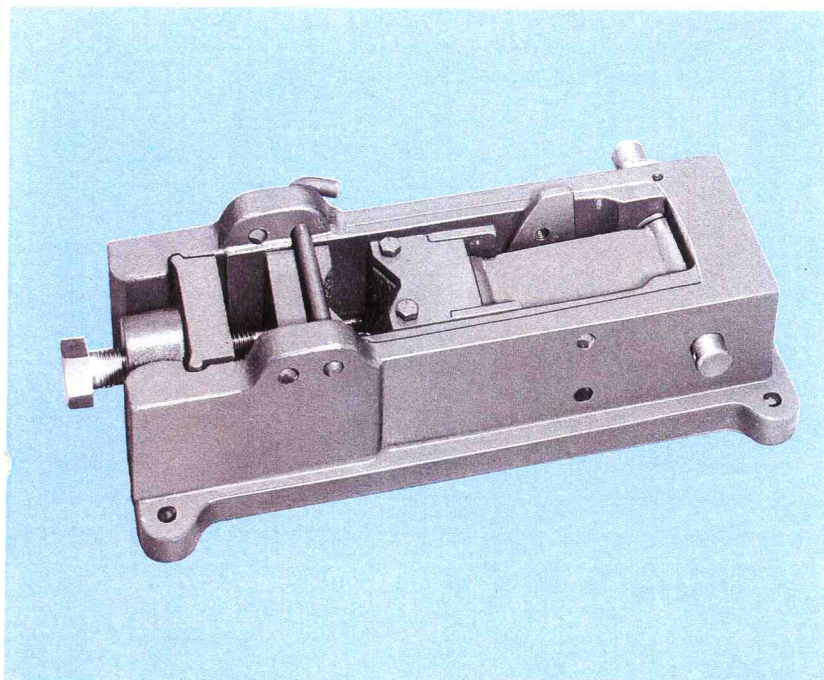

This is designed to securely hold the rod and casing of larger OD to use for water-well and civil engineering work drillings. Jaws included in the clamp body can be changed to meet the sizes of rods or casing to handle. Model S,L,LH and LD are available to meet your requirements.

Model	S	L	LH	LD
Holding Capacity	2 tons	5tons	5 tons	15 tons
Rod size available to handle (mm)	XRT-AW 33.5 – 42.0	XRT-BW 33.5 – 50	BQ-HQ 50 – 88.9	HQ-140 mm 88.9 – 140
Casing size available to handle (mm)	XRT-AX 43 – 53	XRT-BX 43 – 73	AX-NQNU 57 – 94	3-1/2 – 5" 89 – 140
Weight	27 kgs	54 kgs	62 kgs	94 kgs

FOOT SAFETY CLAMP

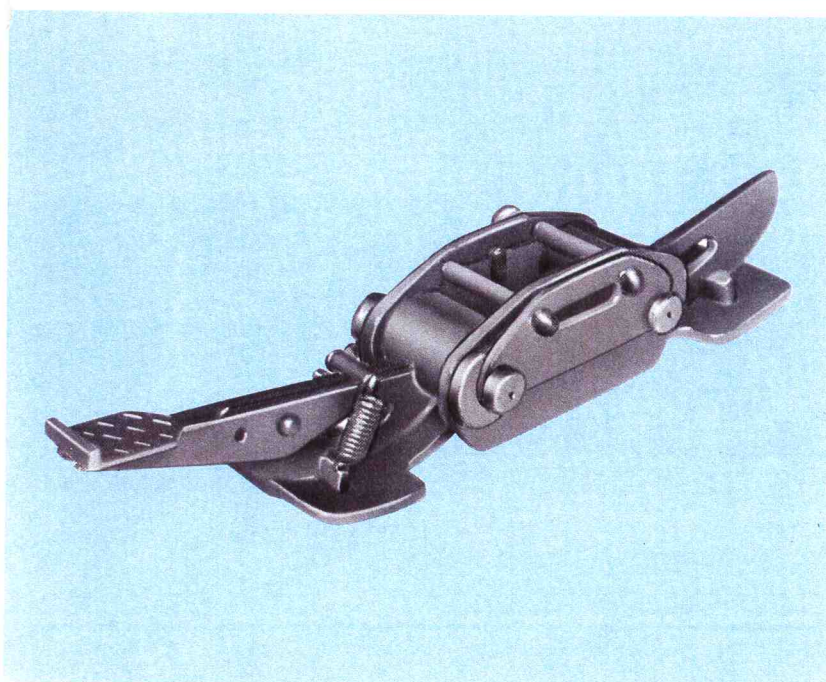

This is a device to securely hold drill-rods and casing-tubes string. By stepping on the foot lever, the jaws will open to make the rod or casing string free. The jaws will close again to the string by stepping off the lever.

Holding capacity	10 Tons
Rod available to handle	AQ-HQ 44.5 – 88.9 mm