


# J SERIES WIRELINE RODS

Manufactured under strict quality control and are processed with high technology.  
Here we supply orthodox genuine Wireline Rods.

## J Series Rod

### Features

- 1) Fast stabbing, quick make-up and break-up
- 2) The heat-threaded rod surface of box thread
- 3) Seal joint formed by full wedge fit between mating threads
- 4) Built-in high torque capacity
- 5) Tapered threads form rigid joints
- 6) Straightness Tolerance

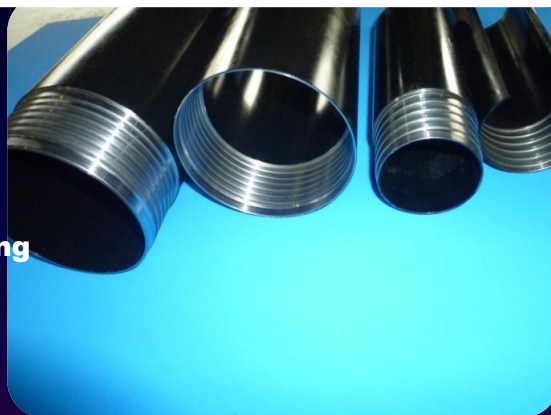

Dimension	EJ		AJ		BJ		NJ		HJ		PJ	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
Rod O.D.	1-3/8	34.9	1-3/4	44.5	2-3/16	55.6	2-3/4	69.9	3-1/2	88.9	4-1/2	114.3
Rod I.D.	1-3/16	26.5	1-3/8	34.9	1-13/16	46.0	2-3/8	60.3	3-1/16	77.8	4-1/16	103.2
Rod Coupling O.D.											4-5/8	117.5
Weight kg/3M	9.6		14.2		18.2		23.3		34.5		46.5	


## “HD” Series Rod

“Epoch-making Wireline Heavy Duty Rod for Greater Depth”

### Features

- 1) “2 steps -Inside Upset”. This realizes seamless rod.
- 2) The “2 steps– Inside Upset” enables to lighten the rod weight.
- 3) Transformed Buttress Threads are focused on strength.


	A	B	C	D	E
HJ-HD	83.2	80.8	73.4	88.9	77.4
NJ-HD	63.8	54.9	54.9	69.9	57.9

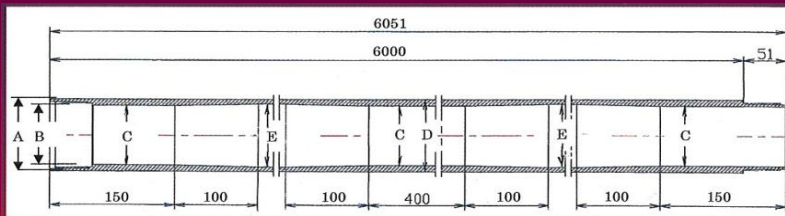

### Features

- 1) Inside-upset structure eliminates couplings.
- 2) Taper thread provides easy make-up/break-up.
- 3) High sealing capability

L 1	3.0m, 1.5m
L 2	100mm
L 3	200mm
D 1	40.5mm
D 2	27.5mm
D'3	31.5mm
Thread Type	Taper 3Thr'd/inch
Weight	13kgf/3m, 7kgf/1.5m

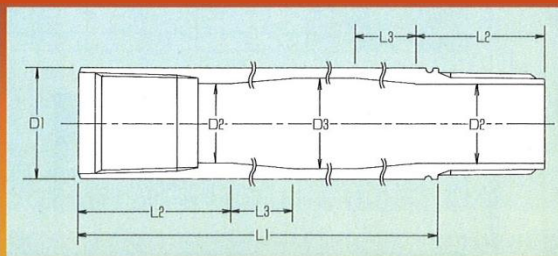

## NT-40.5 Rod